

I-HNVR-1110

H.265 1HDD 10 Channel NVR

The new Impact series of Network Video Recorders (NVRs) is beneficial to customers who want a higher quality of video surveillance enhanced by HD and an advanced setup. This product can be used for video surveillance in banks, offices, manufacturing industries, warehouses, and parking lots - where image quality and clarity is a key priority. The smart features offered by the new Impact series of NVRs greatly help in the effective analysis of the video feed, while optimizing storage.



FEATURES AND BENEFITS

HD INPUT

- IH+265/H.265/H.264 video formats
- Connectable to the third-party network cameras
- Up to 10 channel input
- Supports live view, storage, and playback of the connected camera at up to 8MP resolution

HD TRANSMISSION

- 1xRJ45 self-adaptive 10/100 Mbps network interface

HD OUTPUT

- HDMI and VGA simultaneous output
- HDMI Video output at up to 4K (3840 × 2160) resolution

VARIOUS APPLICATIONS

- Centralized management of IP cameras, including configuration, information import/export, real-time information display, upgrade, etc.
- VCA detection alarm is supported
- Web6 supports plug-in free browsing and can preview videos on all browsers

HD STORAGE

- 1 SATA interface, up to 10TB for 1 HDD
- IH+265 compression effectively reduces the storage space and costs by up to 75%

SPECIFICATIONS

MATERIAL SPECIFICATIONS

INPUT

Video Input	10-ch
Max Resolution	8MP
Bandwidth	Income 50Mbps; Outgoing 40Mbps

OUTPUT


HDMI/VGA Output	HDMI 1-ch, 3840×2160,1920×1080, 1280×720, 1024×768, 1366×768, 1440×900, 1280×800 VGA 1-ch, 1920×1080, 1440×900, 1366×768, 1280×800, 1280×720, 1024×768
Screen Split	1/3/4/5/6/7/8/9/10
Audio Output	1x RCA

DECODING


Decoding Format	IH+265/H.265/H.264
Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Preview Capability	1x8MP, 1x6MP, 1x5MP, 1x4MP, 1x3MP, 4x1080P, 8x720P, 10x4CIF

Synchronous Playback	1x8MP, 1x6MP, 1x5MP, 1x4MP, 1x3MP, 3x1080P, 4x720P
Records Encryption	Yes
HARD DISK	
SATA	1 SATA interface for 1 HDDs
Capacity	Up to 10TB for each HDD
EXTERNAL INTERFACE	
Network Interface	1xRJ45 self-adaptive 10/100 Mbps network interface
USB Interface	2xUSB 2.0
NETWORK	
Protocol	TCP/IP, ICMP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP, IGMP, QoS, IPV4, IPV6, Multicast, ARP, UDP, Telnet, RTMP
System Compatibility	ONVIF (PROFILE S/T)
GENERAL	
Web Version	Web6
Language	English
Operating Conditions	-10°C~55°C, 10%~90% RH
Power Supply	DC12V 3.33A
Consumption (without HDD)	≤10W (without HDD)
Chassis	1U
Dimensions	44x255x231mm, (1.78x10.04x9.09 inch)
Weight (without HDD)	0.8Kg (1.76lb)

DIMENSIONS

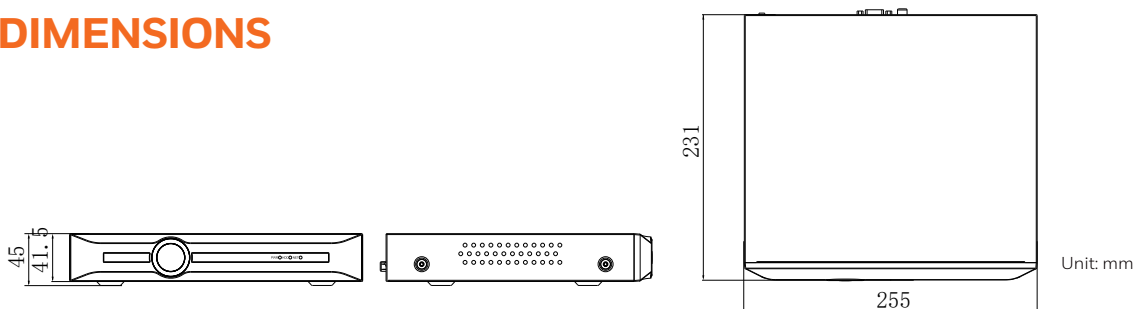

PHYSICAL INTERFACES

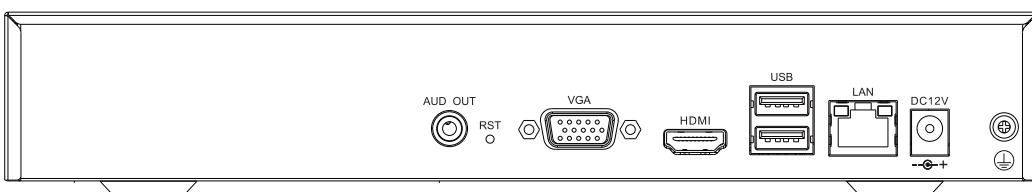

For more information,

www.honeywellbuildings.in
 Call: 000-8000-502167
 Email: enquiry.mms@honeywell.com

Honeywell HBT India Buildings

Unitech Trade Center, 5th Floor, Sector-43,
 Block C, Sushant Lok Phase - I,
 Gurgaon - 122 002.

I-HNVR-1110 | 01 | 05/21
 © 2021 Honeywell International Inc.

IMPACT
 by Honeywell